



SHADED POLE MOTORS

Q FRAME TYPE

REXNORD®

83 x 83 x 40 mm

Motor Design	: Shaded Pole Motor
Housing	: Aluminium Die-cast
Bearing	: Sleeve Bearing
Operating Voltage	: 230V (185 - 245 VAC)
Dielectric Strength	: AC 1500V for 1 minute
Insulation	: Class/B
Insulation Resistance	: Above 100M Ohms at 500 VDC
Connection	: Lead Wire
Feature	: Mounting 4 Legs
Motor Protection	: Thermal Protected
Direction of Rotation	: CCW
Operating Temperature	: -40 to +40°C
Net Weight	: 2000 Grams

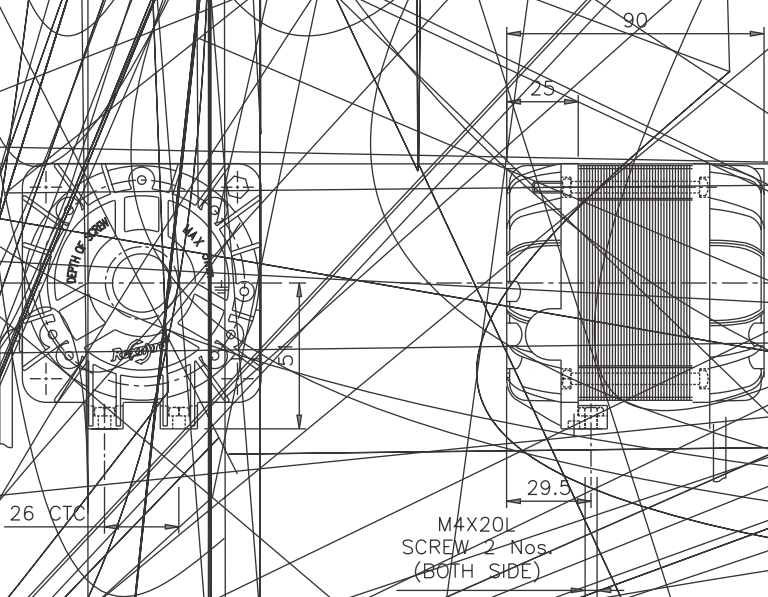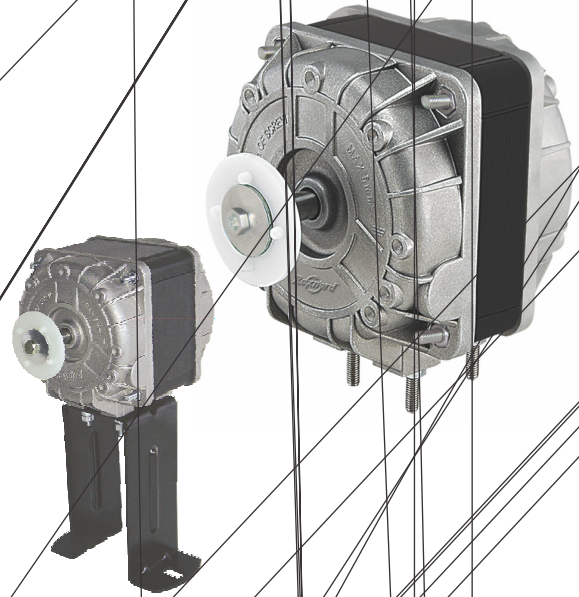

*Specifications Subject to Change Without Notice